

DATA SHEET

R2BC 3000 Hot Water Storage Tank



Main features	
Description	Hot water tank intended for DHW heating, with 2 integrated enamelled heat exchangers. It comes fitted with insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
Working fluid	water (tank), water or water/glycol mixture (max. 1:1) (heat exchanger)
Code	8474

Energy Efficiency Data (as per EC Regulation No. 812/2013)	
Energy efficiency class	N/A
Standing loss	354 W
Storage volume	2786 l

Technical data	
Total tank volume	2841 l
Fluid volume in tank	2786 l
Upper heat exchanger (HE) volume	23 l
Lower heat exchanger volume	32 l
Upper heat exchanger surface area	3,8 m ²
Lower heat exchanger surface area	5,2 m ²
Max. working temperature in tank	95 °C
Max. working temperature in HE	110 °C
Max. working pressure in tank	10 bar
Max. working pressure in HE	10 bar
Tank diameter	1200 mm
Tank diameter with insulation	1400 mm
Tank overall height	2980 mm
Tipping height	3300 mm
Empty weight	698 kg

Hot water heating from 10 °C to 45 °C at heating water temperature 60 °C	
Upper heat exchanger	1510 l/h (61 kW)
Lower heat exchanger	2050 l/h (83 kW)

Materials	
Tank material	S235JR, inner surface enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surface enamelled (DIN 4753-3)
Tank perimeter insulation	PU foam (soft)
Insulation's outer surface	PVC


Accessories	
El. heating element	models ETT-A, D, F, P, M
Heating element max. length	815 mm
Electronic anode rod	code 17371
Electronic anode rod with flange	code 17436

Spare parts (magnesium anode rods)	
Mg anode rod A1 (G 5/4")	objednací kód 3698
Mg anode rod (G 3/4") with flange and gasket	objednací kód 464
Mg anode rod – chain type (G 5/4")	objednací kód 13112

DATA SHEET

R2BC 3000 Hot Water Storage Tank

Heat exchanger pressure drop

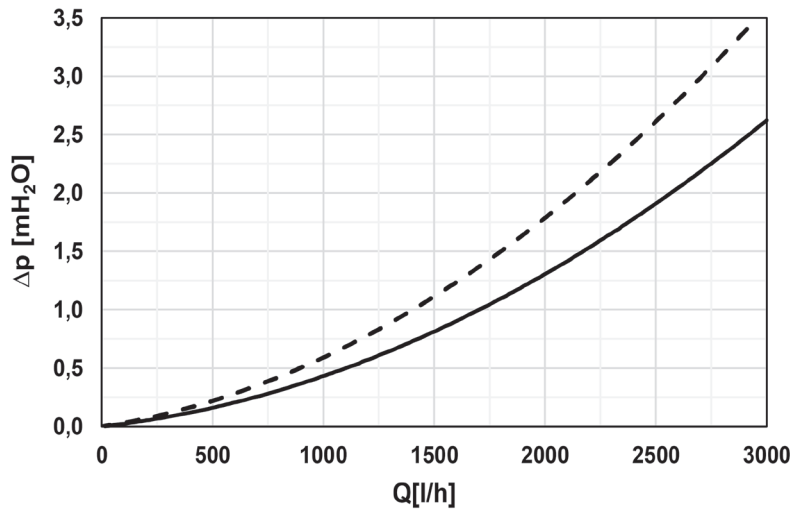

--- lower heat exchanger

— upper heat exchanger

Dimensions

pos.	description	connection	height [mm]
DHW heating			
W1	cold water	G 2" F	430
W2	hot water	G 2" F	2550
W3	recirculation	G 1" F	2040
Auxiliary heat source			
E1	electric heating element	G 6/4" F	1400
Control and safety			
C1	temperature sensor – upper	G 1/2" F	2040
C2	temperature sensor – lower	G 1/2" F	1075
T	temperature indicator	G 1/2" F	2430
Heat sources			
X1	supply from heat source	G 5/4" F	2340
X2	return to heat source	G 5/4" F	1790
X3	supply from heat source	G 5/4" F	1300
X4	return to heat source	G 5/4" F	550
Others			
L1	flange	8 x M10	640
A1	magnesium anode rod	G 5/4" F	2900
A2	magnesium anode rod	G 5/4" F	640
A3	magnesium anode rod	G 5/4" F	1640

